

PRELIMINARY DATASHEET



## Features :

- Switching topology : PWM based IGBT switching
- Fault correction time : 20msec
- Chopping frequency : 16 to 20 kHz
- Auto/ Manual bypass switch
- LED indications : Overload, Overvoltage, Undervoltage, Overcurrent
- Mitigate voltage sags in accordance to IEC 61000-4-11 standards
- No battery or any other storage components required

## Input specification

|   |                                   |
|---|-----------------------------------|
| Nominal input voltage                                 | 400V AC                           |
| Input voltage range                                   | 320 - 480V                        |
| Operating frequency                                   | 47-65 Hz                          |
| Maximum rated input current                           | 27A                               |
| Input MCB rating                                      | 40A, 3 Pole, MCB                  |
| Input connection                                      | Terminal block [R, Y, B, N and E] |
| Input wire size                                       | 6 sq.mm (AWG 10)                  |
| Relaxed operating voltage for $\pm 10\%$ compensation | 277 - 520V AC                     |

## Performance

|   |  |
|---|--|
| Eliminates voltage sags                   | Upto 50V (22 % considering 230V nominal) |
| Swell compensation                        | Upto 50V (20% considering 230V nominal)  |
| Compensation irrespective of phase        | Correct all three phases                 |
| Cooling method                            | Fan cooling                              |
| Compensation of depth & long disturbances | Continuous correction possible (24x7)    |

## Output specification

|                              |  |
|------------------------------|--|
| Nominal output voltage       | 400V AC  |
| Output voltage range         | 400V AC Ph-Ph and 220-230-240V Ph-Neutral (Selectable) |
| Power efficiency             | Typically over 97% (with 20 to 100% load conditions)   |
| Correction initiation        | Less than 20 msec                                      |
| Technology                   | PWM based IGBT switching                               |
| Maximum rated output current | 22A per phase  |
| Voltage compensation         | Up to 50V  |
| Voltage regulation           | $\pm 1\%$  |
| Output connection            | Terminal block [L1, L2, L3, N and E]                   |
| Load Bypass                  | Auto/ Manual   |

## Display option

|                       |  |
|-----------------------|--|
| 7 Segment LED display | Regular input and output                                   |
| Bar graph LED         | Load indication with resolution of 10%                     |
| LED indication        | Overload, Overvoltage, Undervoltage, Overcurrent           |
| Buzzer indication     | Power on, overload, overvoltage, undervoltage, overcurrent |

## Power specifications

|                   |       |
|-------------------|-------|
| Capacity in kVA   | 15kVA |
| Power consumption | 300VA |

## Mechanical properties

|                    |                              |
|--------------------|------------------------------|
| Dimensions (In mm) | 617(W) x 368(H) x 552(D)mm   |
| Weight             | 80 kg approx                 |
| Mounting           | 4 High Quality Castor wheels |


## Protection functions

|                   |   |
|-------------------|---|
| Input protection  | Line overcurrent, overvoltage, undervoltage |
| Output protection | Overload, Over current trip                 |


## Environment conditions

|                  |                                       |
|------------------|---------------------------------------|
| Ambient temp.    | 0 - 50°C, 10 to 90% RH non-condensing |
| Protection class | IP20                                  |

## Dimensions (All are in mm)

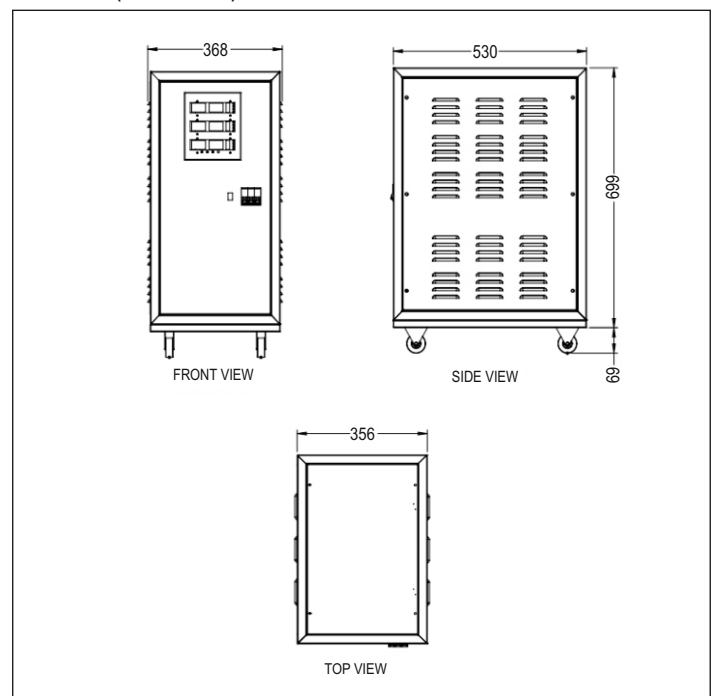

## Terminal connections

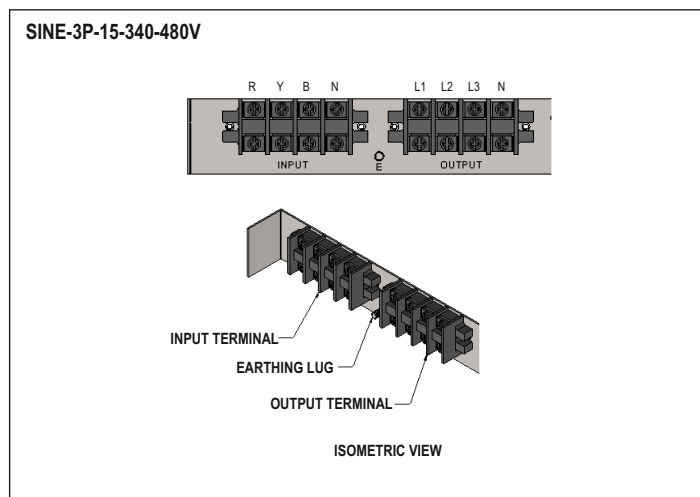

## Ordering information

| Product code        | Certification |
|---------------------|---------------|
| SINE-3P-15-340/480V | ---           |

