



### Features :

- Supports 90 - 264 VAC / 127 - 373 VDC
- Efficiency up to 89 %
- - 40°C to + 70°C Operating Temperature
- Compact size and 1U low profile
- Protection against short circuit, overload & overvoltage
- Cooling by free air convection

Certification :


### SPECIFICATIONS:

MODEL		TPS120-24
OUTPUT	NOMINAL DC VOLTAGE	24 V
	RATED CURRENT	5 A
	RATED POWER	120 W
	RIPPLE & NOISE (max)	< 1 % of Vout
	VOLTAGE ADJ. RANGE	24 V to 28 V
	VOLTAGE TOLERANCE	± 1 %
	LINE REGULATION	± 1 %
	LOAD REGULATION	± 1 %
	TURN ON TIME	< 1 sec @ 230 VAC & < 3 sec @ 115 VAC, Full load
	HOLD UP TIME	≥ 60 ms at 230 VAC & ≥ 10 ms at 115 VAC, Full load
INPUT	RISE TIME	< 100 ms
	VOLTAGE RANGE	90 - 264 VAC / 127- 373 VDC
	FREQUENCY RANGE	47 - 63 Hz
	EFFICIENCY @ 230 VAC	Up to 89 %
	AC CURRENT	2.2 A @ 115 VAC; 1.5 A @ 230 VAC
	INRUSH CURRENT	< 60 Amps; Measured at 264 VAC, 25°C Ambient, Cold start
	LEAKAGE CURRENT	< 1 mA; 264 VAC input
	NO LOAD POWER CONSUMPTION	< 0.5 W; 115 VAC input
PROTECTION	OVERLOAD	> 110 % of rated output current; Hiccup mode; Autorecovery type.
	OVERVOLTAGE	28.5 - 33.5 VDC Latched type; Input AC power to be recycle to recover the power supply
	OUTPUT SHORT CIRCUIT	Hiccup mode when output is shorted; Autorecovery type.
ENVIRONMENT	OPERATING TEMP	- 40°C to + 70°C; De-rate linearly above 50°C from 100 % load at 50°C to 50 % load at 70°C, - 40°C to 0°C startup is guaranteed with spec deviation ( Output ripple can be more than 10 % of the output voltage. )
	STORAGE TEMP	- 40°C to + 85°C
	COOLING	Natural convection cooled
	HUMIDITY	5 to 95 % RH, Non condensing
	ALTITUDE	2000 m
	VIBRATION	Component: 10 ~ 500 Hz, 2 G 10 min. / 1 cycle, period for 60 min. each along X, Y, Z axes
SAFETY & EMC	DIELECTRIC WITHSTAND VOLTAGE	I/P to Earth : 2500 VAC I/P to O/P : 4000 VAC O/P to Earth : 1500 VAC
RELIABILITY	MTBF	> 370K hrs. as per MIL-HDBK-217F (25°C)
MECHANICAL	DIMENSION	129 x 97 x 30 mm ( L x W x H )
	WEIGHT	< 340 gms
	MOUNTING	Table Top


## Compliance

Applicable EMI / EMC Standards		
Category	Reference Standards	Testing Level
Conducted Emission	CISPR32	CLASS B
Radiated Emission	CISPR32	CLASS A
Electrostatic Discharge	IEC 61000-4-2	Level 4, Criteria A Level 3, Criteria A
Radiated Susceptibility	IEC 61000-4-3	Level 3, Criteria B
Electrical Fast Transient / Burst	IEC 61000-4-4	Level 3, Criteria A
Surge	IEC 61000-4-5	Level 3, Criteria A
Conducted Susceptibility	IEC 61000-4-6	Level 3, Criteria B
Power Frequency Magnetic Field	IEC 61000-4-8	Level 4, Criteria A
Voltage Dips & Interruption	IEC 61000-4-11	Criteria A & B
Safety	Designed to meet IEC 62368 -1	

## De-rating curve

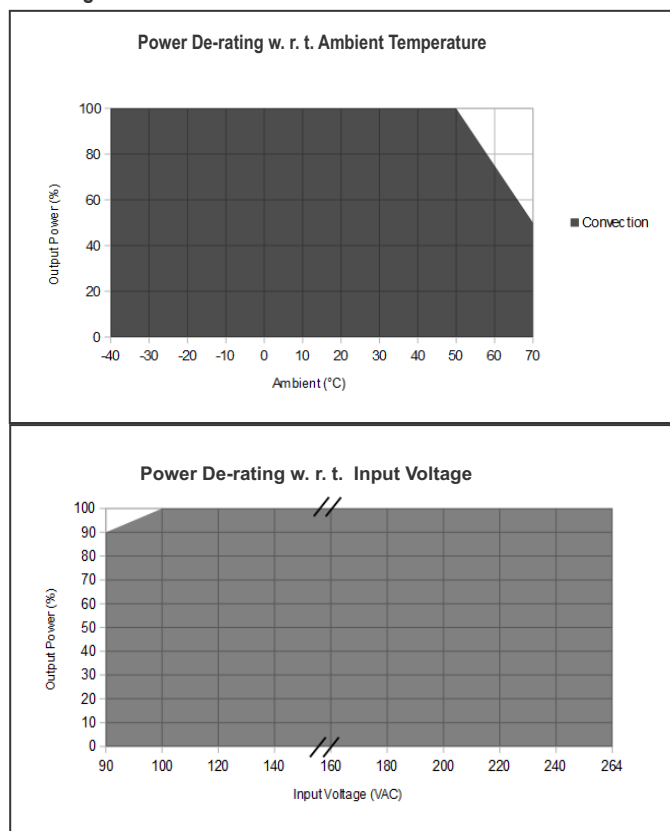

## Mechanical dimensions

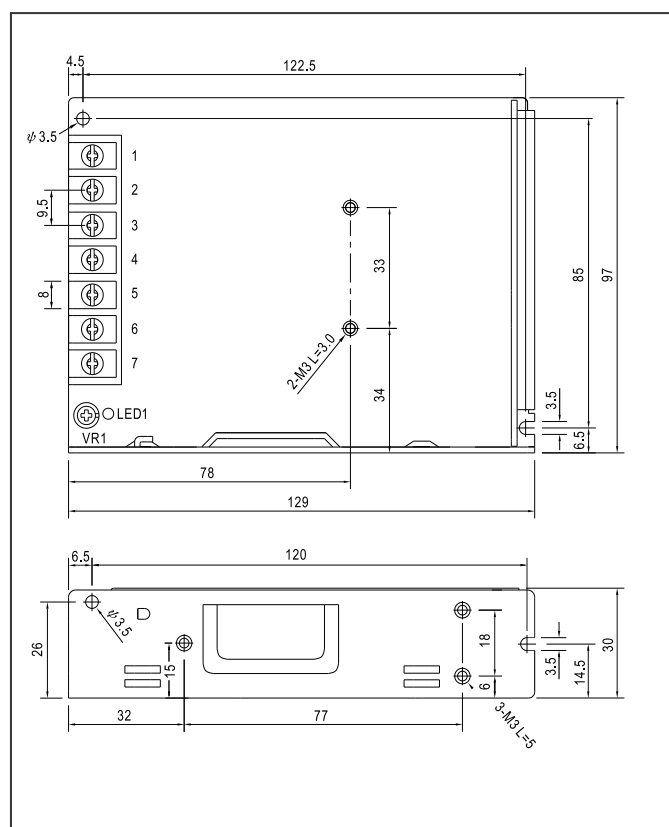

## Connectors details

Ref Des	Pin number	Function
TRL1	1	AC Line
	2	AC Neutral
	3	Earth
	4,5	V1 Positive
	6,7	V1 Negative

## Ordering information

Product Code	Description	Certification
TPS120-24	120 W, 24V / 5 A Table Top Power Supply in metal body.	CE